


**SMALL FAST TUNING FILTER  
10÷30 MHz**

P/N: 550-00040-000

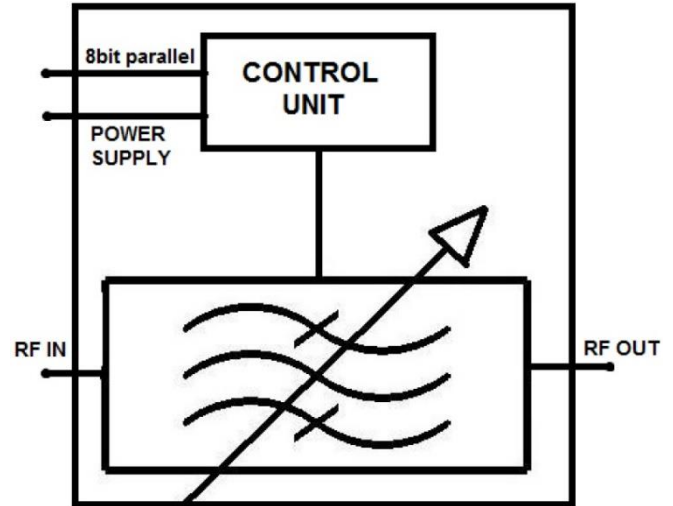

**ELECTRICAL SPECIFICATIONS**

Frequency coverage	: 10 – 30 MHz
Impedance	: 50 Ω
Power Handling	: Up to 1 W continuous*
Center Frequency Drift	: 80 ppm/°C
Tuning Control	: 8 bit parallel
Tuning Speed	: 15 μs typ.
Tuning Positions	: 250
DC Power	: +5 VDC @ 10 to 350 mA +100 VDC @ 1 mA
**Insertion Loss	: 3.0 dB typ 4.3 dB max
**3dB % BW	: 5.0 typ 5.3 max
**Shape Factor	: 6.3 typ – 6.7 max
**Ultimate	: 60 dB typ.

**MECHANICAL SPECIFICATIONS**

Size (excluding connectors)	: 15.2 (0.6) x 35.6 (1.4) x 58.4 (2.3) mm (inch)
Connectors RF	: Pin (Thru Hole Mounting)
Connector Control	: Pin (Thru Hole Mounting)
Weight	: 3.2 oz / 90 g

**ENVIRONMENTAL**

Operating Temperature Range	: -40 ÷ +85 °C
-----------------------------	----------------

\*Source/Load VSWR has effect on power handling

\*\*Other tuning options available on Request

All data may change without notice. Measurement tolerances to be added.

Tutte le informazioni contenute in questo documento sono di esclusiva proprietà di IES s.r.l. – Tutti i diritti sono riservati  
All information contained in this document is the property of IES s.r.l. - All rights reserved